

INDICADOR- VISOR DE CAUDAL

Type F - With Flap & Scale Plate

Data Sheet VP1.01

- Stainless steel flap and scale plate
- CE Marked and fully compliant with the Pressure Equipment Directive
- With threaded or flange connections
- Pressures up to 60 Bar
- Temperatures up to 250°C
- Short lead Times



Applications:

With the flap and easy to read scale the Type F sight flow indicator is used to check the flow rate of a liquid in a pipeline. It can be used in vertical or horizontal lines and is ideal as a plant safety device where you need to maintain a constant flow, for example in lubricating or cooling systems.

Advantages:

- Fully PED Compliant
- Ease of Maintenance:
Glasses can be individually removed & replaced
- Easy to read scale
- Durable construction

Construction:

- Screwed connections to NPT, BSP parallel or taper. Socket weld also available
- Standard Flanges include ANSI 150, ANSI 300 and PN16
- Special flanges available
- Body cast in stainless steel or carbon steel
- Stainless steel covers, screws & flap
- PTFE gaskets
- Sodalime glass to BS3463 rated to 16 Bar
- Borosilicate glass recommended for steam & condensate
- Mica discs used to protect glass from alkaline liquids or steam

Options:

- **Special Materials:** Including Super Duplex or Low Carbon Steels.
- **NACE MR 0175:** Sightglasses can be produced to conform with NACE MR0175
- **Lining:** Body & flap can be lined with HALAR, ECTFE or PFA for particularly corrosive applications
- **High pressure** soda lime glass to BS3463 rated to 60 bar
- **High pressure** range uses powder coated mild steel covers as standard, stainless steel covers available as an option
- **Toughened Borosilicate** to BS3463 or DIN7080 rated to 16 Bar
- **External pointer** – for dirty or darkly coloured liquids one window can be replaced with a steel cover & external pointer
- **Spring** – for high flow rates and vertical lines the flap can be spring loaded. This option gives 3 times the normal flow range
- **Lighting** – illuminate the process. Wide range of process lighting available for both safe and Ex Hazardous area environments

Quality:

- Manufactured to the highest standard
- Quality system is independently audited by BSI and certified to ISO9000.
- Indicators are fully PED compliant & CE marked where required
- Full material traceability is maintained, material Test certificates & pressure test certificates supplied on request



CONDUCCIÓN Y ESTANQUEIDAD DE FLUIDOS

TECNO PRODUCTS, S.L.

Pisuerga, 2 · 08028-BARCELONA
Telf. 93 448 39 22* - Fax: 93 448 38 60



<http://www.tecno-products.com>
e-mail:info@tecno-products.com



ISO 9001 : 2000
NºRegistro : ESP 4425

PRODUCTOS Y TECNOLOGIA PARA LA INDUSTRIA QUIMICA, ALIMENTARIA Y FARMACEUTICA


Specification Code

Code		Description	
SF		Body	
CF		Stainless steel body BS 1504 316 C16	
		Carbon steel body BS 1504 161 GR480	
	H	Glass Material & Pressure Range	
	B	Toughened soda lime glass to BS3463 rated to 16 bar (Standard)	
	HB	Toughened soda lime glass to BS3463 rated to 40 bar	
		Toughened borosilicate glass to BS3463	
		Toughened borosilicate glass to DIN 7080	
		Indicator Size	Flow Ranges – litres/minute
		Scale Reading	2 4 6 8 10
	015	15mm / 1/2"	3.0 4.5 5.5 8.0 20.0
	020	20mm / 3/4"	3.0 5.0 6.0 9.5 20.0
	025	25mm / 1"	3.5 6.0 8.0 13.0 30.0
	040	40mm / 1 1/2"	8.5 12.5 16.7 25.0 55.0
	050	50mm / 2"	11.0 18.0 25.0 38.0 70.0
	080	80mm / 3"	29.0 46.0 64.0 118.0 230.0
	100	100mm / 4"	53.0 86.0 127.0 188.0 400.0
	150	150mm / 6"	given on request
	200	200mm / 8"	given on request
		End Connection	
	A	ANSI 150	
	C	ANSI 300	
	N	PN16	
	1	BSP	
	2	BSPT	
	3	NPT	
	4	Socket Weld	

Materials of construction

Covers (Standard)	-	Stainless steel BS 1504 304 C15
(High Pressure)	-	Powder coated mild steel (machined stainless steel an option)
Internal Gasket	-	PTFE
External Gasket	-	Klingsil C4400
Edge Protector	-	Klingsil C4400
Fastners (Standard)	-	A2 Stainless Steel
(High Pressure)	-	High tensile steel

Dimensions

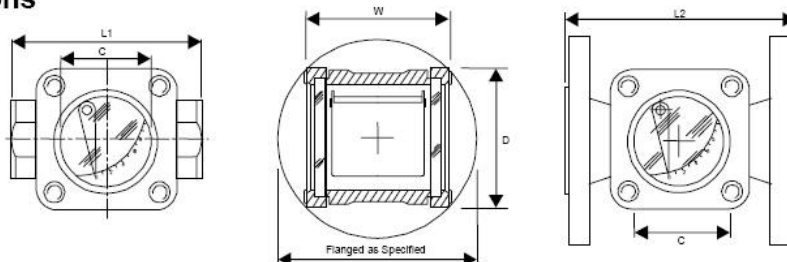

NOMINAL BORE	LENGTH L1	LENGTH L2	WIDTH W	DEPTH D	CLEARVIEW C
15/20mm	85	130	63	60	42
25mm	95	140	72	66	48
40mm	120	180	102	84	62
50mm	150	220	118	106	77
80mm	N/A	260	160	170	100
100mm	N/A	260	196	170	100
150mm	N/A	360	304	220	150



CONDUCCIÓN Y ESTANQUEIDAD DE FLUIDOS

TECNO PRODUCTS, S.L.

Pisuerga, 2 · 08028-BARCELONA
Telf. 93 448 39 22* - Fax: 93 448 38 60



<http://www.tecno-products.com>
e-mail:info@tecno-products.com



ISO 9001 : 2000
NºRegistro : ESP 4425

PRODUCTOS Y TECNOLOGIA PARA LA INDUSTRIA QUIMICA, ALIMENTARIA Y FARMACEUTICA